

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
18 March 2004 (18.03.2004)


PCT

(10) International Publication Number  
**WO 2004/022450 A1**

- (51) International Patent Classification<sup>7</sup>: **B65D 81/34** (74) Agents: CANTALUPPI, Stefano et al.; c/o Cantaluppi & Partners S.r.l., Via Matteotti, 26, I-35137 Padova (IT).
- (21) International Application Number: PCT/IT2002/000567 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 5 September 2002 (05.09.2002)
- (25) Filing Language: Italian
- (26) Publication Language: English
- (71) Applicant (*for all designated States except US*): GUIDA & C. S.P.A. [IT/IT]; Riviera di Chiaia, 264, I-80121 Napoli (IT).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): GUIDA, Francesco [IT/IT]; Riviera di Chiaia, 264, I-80121 Napoli (IT).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A SINGLE-USE, SELF-HEATING OR SELF-COOLING CONTAINER, PARTICULARLY FOR BEVERAGES AND METHOD FOR MANUFACTURING THE SAME

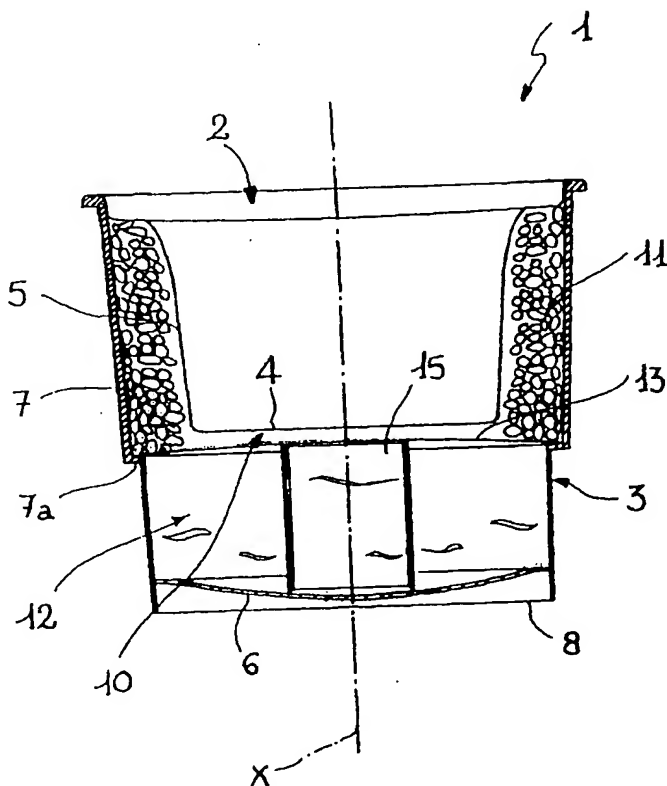

(57) Abstract: A single-use, self-heating or self-cooling container, particularly for beverages, producible in a plurality of sizes, comprises a first receptacle (2) containing a beverage and inserted into a second receptacle (3), a first compartment (11) formed between the first and the second receptacle and a second compartment (12) formed on the base of the second receptacle and separated from the first compartment by a breakable diaphragm (13). In these compartments (11, 12) are separately and respectively arranged at least a first and a second component of an exothermic or endothermic reaction, and the first component is arranged in the first compartment (11) annularly around the first receptacle (2), while the diaphragm (13) extends as a separation of these compartments substantially against the base (4) of the first receptacle.

WO 2004/022450 A1

BEST AVAILABLE COPY